

# **EXHIBIT 2**



absorbed or emitted by the isolated portion is measured and correlated to values derived from known materials measured under similar conditions.

Spectroscopic analysis is a common tool used in laboratories and industrial processes. Its use includes determining the molecular identity and properties of a chemical composition as well as monitoring the progress of a reaction. Whether conducting a laboratory exercise or industrial process, this type of information is desirable. This is so because, for example, data derived from spectroscopic analysis may be used to identify the final product of these reactions and determine the consumption and/or identity of intermediates produced at selected stages in a multi stage process.

For industrial processes and particularly industrial chemical reactions, in-situ identification and monitoring of the (i) reaction constituents, (ii) the reaction intermediates, (iii) the consumption rate of the starting materials, and (iv) the final product are desirable. In-situ analysis is desirable generally because the analysis environment is the reaction environment within the reaction vessel. In this way, the isolation and preparation of a portion of the substance under investigation prior to irradiation is avoided. And still more desirable is the acquisition and assimilation of analysis information after the passage of relatively a short period of time from the moment the analysis process is initiated (otherwise referred to as "real time analysis").

However, there remains many industrial process, and particularly industrial chemical reaction environments, for which spectroscopic analysis techniques do not offer an investigator the option of conducting reliable, in-situ, real time analysis. As such, there exists a need for further development in the field of in-situ, real time spectroscopic analysis and the application thereof in industrial processes.

### SUMMARY OF THE INVENTION

The present invention provides both apparatus and methods for conducting in-situ, real time spectroscopic analysis of one or more reaction constituents



present in a reactor, particularly a slurry olefin polymerization reactor and more particularly, a slurry loop olefin polymerization reactor. Examples of reaction constituents include polymerized and polymerizable olefins. Examples of polymerized olefins include but are not limited to polypropylene, polyethylene, polyisobutylene, and homopolymers and copolymers thereof. Other examples of reactor constituents include, but are not limited to, hydrogen, propane, ethane, butane monomers, and comonomers. Examples of monomers and comonomers include, but are not limited to, ethylene, propylene, butene, hexene, octene, isobutylene, styrene, norbornene and the like.

Without limiting the present invention to any particular spectroscopic analysis technique, the inventors have observed in a slurry reaction environment a correlation between in-situ collected Raman spectra (a product of Raman spectroscopy) from the liquid phase of the reaction environment and the concentration of at least one reactor constituent. Furthermore, the inventors have discovered that this correlation, in combination with in-situ, real time analysis of at least one reactor constituent in such a reactor will allow for improved control of the final product properties, such as melt flow rate. Improved control of the final product properties is achieved by metering the flow of at least one reactor constituent into the slurry reactor in response to the in-situ measured concentration of at least one reactor constituent.

In one embodiment, a method of olefin polymerization in a reactor having reactor constituents in a liquid phase is provided. The method steps include measuring in-situ a first reactor constituent and metering the flow of a second reactor constituent into the reactor in response to the measuring step. The first and second reactor constituents may be the same constituent or they may be different constituents.

In another embodiment, another method of olefin polymerization in a multi-phase reactor containing reactor constituents is provided. The method steps include irradiating in-situ the reactor constituents, measuring scattered or reflected energy from the irradiated reactor constituents, determining from the measured


4

scattered or reflected energy a concentration of at least one reactor constituent, and metering the flow of at least one reactor constituent into the reactor in response to the determining step.

5 In another embodiment, a method of olefin polymerization in a reactor containing reactor constituents in a liquid phase is provided. These method steps include irradiating in-situ the liquid phase, measuring the frequencies scattered or reflected by the irradiated liquid phase, correlating at least one measured frequency with the concentration of a first reactor constituent, and metering, in response to the correlating step, a flow of the first reactor constituent into the reactor.

10 In another embodiment, another method of polymerizing a polyolefin in a reactor containing reactor constituents in a liquid phase is provided. These method steps include irradiating in-situ the liquid phase, measuring the frequencies scattered by the irradiated liquid phase, determining from the measured frequencies a concentration of one or more reactor constituents, comparing the concentration of one or more reactor constituents with one or more values that correlate to one or more selected physical properties of the polyolefin, and metering, in response to the correlating step, the flow of one or more reactor constituents into the reactor. One of the selected physical properties of the polyolefin may be melt flow rate. Additionally, the metered flow of one or more reactor constituents into the reactor may be controlled such that the polyolefin produced may be defined, in part, by a melt flow rate value within a selected melt flow rate range.

15 20 25 30 In another embodiment, a method of olefin polymerization in a slurry reactor containing reactor constituents, including hydrogen, in a liquid phase is provided. These method steps include, irradiating in-situ the liquid phase, measuring the frequency scattered or reflected by the hydrogen in the liquid phase, determining the concentration of hydrogen in the liquid phase from the measured frequency, and metering, in response to the concentration of hydrogen measured, the flow of the hydrogen into the reactor.



### **BRIEF DESCRIPTION OF THE DRAWINGS**

Figure 1 is a block diagram of a slurry loop reactor plant schematically illustrating an in-situ Raman spectroscopic system and data feed from the same into the slurry loop reactor plant control system.

Figure 2 is a schematic view of the fiber optic probe assembly.

Figure 3 is an enlarged, fragmented, cross sectional view of a fiber optic probe tip.

Figure 4 is a schematic illustration of a laboratory slurry reactor.

Figure 5a is an illustration of Raman spectra of a pentane/propylene slurry.

Figure 5b is an expanded view of a portion of the spectra of Figure 5.

Figure 6 is a plot of hydrogen pressure vs. hydrogen prediction by Raman.

Figure 7 is an expanded Raman spectra of acetonitrile in pentane.

Figure 8 is an illustration of Raman spectrum of Polypropylene granules.

Figure 9 is a plot of predicted MFR from Raman analysis vs. known MFR.

Figure 10 is a plot of 1-hexene and ethylene Raman spectra.

Figure 11 is a plot of a relationship between the peak height of 1-hexene vs. 1-hexene concentration.

Figure 12 is a plot of a relationship between the peak height of the ethylene vs. ethylene concentration.

Figure 13 is a plot of an expanded Raman spectra for the slurry described in Example 5.

Figure 14 is a plot of a relationship between the ethylene peak ratio and the gas chromatograph ethylene concentration measurement.

Figure 15 is a plot of a correlation between the Raman polyethylene copolymer peak ratio and the slurry density/polyethylene copolymer concentration in the slurry loop reactor described in Example 5.

Figure 16 is a schematic illustration of an image probe assembly.

6

## DETAILED DESCRIPTION OF THE INVENTION

Sub AI

5 The present invention provides both apparatus and methods for conducting in-situ, real time spectroscopic analysis of one or more reactor constituents present in a reactor, particularly a slurry olefin polymerization reactor and more particularly, a slurry loop olefin polymerization reactor. Examples of reaction constituents include, but are not limited to polymerized and polymerizable olefins. Generally, polymerizable olefins include, but are not limited to, C<sub>2</sub>, C<sub>3</sub>-C<sub>20</sub>, alpha olefins, C<sub>4</sub>-C<sub>20</sub> diolefins, C<sub>5</sub>-C<sub>20</sub> cyclic olefins, C<sub>7</sub>-C<sub>20</sub> vinyl aromatic monomers and C<sub>4</sub>-C<sub>20</sub> geminally disubstituted olefins. More specific examples of

10 polymerizable olefins include but are not limited to propylene, ethylene, 1-butene, 1-hexene, 1-octene, polyisobutylene, 1,4-hexedine dicyclopentadiene, norbornene, ethylidene norbornene, vinyl norbornene and styrene, and products thereof, such as polyolefin copolymer elastomers and engineering olefin copolymers.

15 A slurry loop olefin polymerization reactor can generally be described as a loop-shaped continuous tube. In some instances, the reactor design may be generally "O" shaped. One or more fluid circulating devices, such as an axial pump, urge the reactor constituents within the tube in a desired direction so as to create a circulating current or flow of the reactor constituents within the tube. Desirably, the fluid circulating devices are designed to provide high velocity of

20 motion and a very intensive and well-defined mixing pattern of the reactor constituents. The reactor may be totally or partially jacketed with cooling water in order to remove heat generated by polymer polymerization.

25 In the slurry loop olefin polymerization reactor, the polymerization medium may include reactor constituents, such as, a liquid monomer, like propylene and/or a hydrocarbon solvent or diluent, advantageously aliphatic paraffin such as propane, isobutane, hexane, heptane, cyclohexane, etc. and/or an aromatic diluent such as toluene. The polymerization temperatures may be those considered low, e.g., less than 50° C, desirably 0° C - 30° C, or may be in a higher range, such as up to about 150° C, desirably from about 50° C up to about

30 80° C, or at any ranges between the end points indicated. Pressures can vary from

7

about 100 to about 700 psia (0.69-4.8 MPa). Additional description is given in U.S. Patents 5,274,056 and 4,182,810 and WO 94/21962 which are each fully incorporated by reference. As such, the reactor constituents generally are a combination of both solids, such as for example catalysts, catalyst supports, polymerized olefins, and the like as understood by those skilled in the art and liquids, such as those described above. The percentage of solids within the reactor constituents may be as high as 60 weight percent (wt%) of the reactor constituents. Desirably, the weight percent of solids is in the range of 45 wt% to 50 wt%.

The slurry loop olefin polymerization reactor may be operated in a single stage process or in multistage processes. In multistage processing, the polymerization of olefins is carried out in two or more reactors. These reactors may be configured in series or in parallel or a combination thereof. Examples of other olefin polymerization reactors suitable for multistage processing with slurry loop olefin polymerization reactors include slurry and slurry loop olefin polymerization reactors, gas phase olefin polymerization reactors, and other moving-bed, fixed-bed, or fluid-bed reactors.

Without limiting the present invention to any particular spectroscopic analysis technique, the present invention employs Raman spectroscopic techniques to determine the in-situ concentration of at least one reactor constituent, such as for example, hydrogen and desirably dissolved hydrogen present in the liquid phase. Examples of other measurable reactor constituents include but are not limited to diluents, monomers, comonomers, the identity of reaction intermediates, and final polymer properties, such as melt flow rate, comonomer content, crystallinity, melt index, viscosity index, polymer melt viscosity, density and percent unsaturation, and the like.

Raman spectroscopy analysis begins by irradiating a material under investigation with energy, such as electromagnetic energy for example in the visible or near infrared wavelength regions. The radiation is scattered upon impact with the material. The scattered radiation may be classified as elastically





scattered and inelastically scattered radiation. The inelastically scattered radiation is referred to as Raman scatter. The wavelengths and intensities of the Raman scatter make up the Raman spectrum. It is the Raman spectrum that provides chemical, structural and other information about the irradiated material.

5           The present invention utilizes data derived from in-situ Raman sampling of reactor constituents in the liquid phase of a slurry olefin polymerization reactor. Such data includes properties and concentrations of reactor constituents. This data is used to control the polymerization reaction and final polymer product properties, such as melt flow rate, comonomer content, and the like. The  
10           polymerization reaction control is achieved, for example, by metering the flow of reactor constituents into the reactor in response to the Raman sampling data. These and other details of the present invention will be more fully described by reference to the accompanying Figures and the following discussion.

          Turning now to Figure 1, a slurry loop reactor plant 100 is schematically  
15           illustrated. The slurry loop reactor plant 100 includes a slurry loop reactor vessel, portions of which are designated by reference numbers 102a and 102b, an analyzer system 104, a reactor control system 106 and a reactor constituent feed source 108. An example of a suitable reactor control system 106 is more fully  
20           described in U.S. Patent No. 5,682,309 which is incorporated by reference herein in its entirety.

          Briefly, the reactor control system 106 controls the slurry loop reactor plant processes. These processes include (i) manipulated variables, such as for example, hydrogen feed flow rate, total feed rate and catalyst flow rate and (ii)  
25           control variables, such as, for example, melt flow ratio, ethylene content, and product rate. The reactor control system 106 includes a processor, sensors and sensor circuitry (not shown). The sensors and sensor circuitry provide data, such as measures of the control variables. The processor provides memory for storing data, such as correction time constants, upper and lower limits for control variables and generates signals responsive to sensor data and limits data. Such  
30           signals generated by the reactor control system 106 and conveyed by conduit 105

9

to the reactor constituent feed source 108 can influence the metering of reactor constituents from the reactor constituent feed source 108 through conduit 107 and into the slurry loop reactor vessel 102b.

The analyzer system 104 includes an in-situ probe 139, such as a fiber optic probe, secured to the reactor vessel 102a, a radiation source 112, such as a laser, connected to the probe 139 by a conduit 114, such as a fiber optic cable. Another conduit 116, such as a fiber optic cable, connects the probe 139 to a spectrum converter 118, such as a Raman spectrum converter. The spectrum converter 118 is connected via conduit 120 to an analyzer 122, such as a Raman analyzer. The analyzer 122 is connected via conduit 124 to the reactor control system 106.

The probe 139 includes a center radiation transmission conduit (not shown), such as a fiber optic cable, for conducting radiation energy from the radiation source 112 into the reactor vessel 102 and ultimately for irradiating one or more reactor constituents. Surrounding the center conduit is a plurality of receiving conduits (not shown), such as a plurality of fiber optic cables, for receiving radiation scattered by at least one of the irradiated reactor constituents. The receiving conduits also convey the scattered radiation to the spectrum converter 118.

In the operation of the present invention, laser light from irradiation source 112 is delivered via an optical fiber within conduit 114 to an optical fiber within the center radiation transmission conduit which is in communication with the reactor constituents. Irradiation of the reactor constituents generates scattered radiation, a portion of which is collected by one or more optical fibers that form the receiving conduits. The collected scattered radiation is conveyed from the receiving conduits to the spectrum converter 118 by one or more optical fibers within conduit 116. In the spectrum converter 118, the scattered radiation is filtered by a holographic notch filter to remove unshifted radiation. A CCD (Charged Couple Device) camera records radiation intensity over a range of selected wavelengths. The selection of wavelengths is dependent, in part, on the

wavelength of the laser light irradiating the reactor constituents and the reactor constituents being investigated. The analyzer 122 receives the wavelength data from the spectrum converter 118 via conduit 120. The analyzer may be preprogrammed to examine selected wavelengths corresponding to reactor constituents that the reactor operator may desire to monitor and/or examine. For example, the wavelength shift of  $4140\text{ cm}^{-1}$  corresponds to the dissolved hydrogen in the slurry loop reactor vessel 102. The wavelength shifts for other reactor constituents may be found in "The Handbook of Infrared And Raman Characteristic Frequencies of Organic Molecules," Daimay Lin-Vien, et al, (1991). The recorded intensities may be plotted as peaks of varying heights as a function of wavelength. Information, such as the concentration of the reactor constituent, may be estimated by calculating the area under or the height of one or more of the associated peaks. Alternatively, multivariate statistical methods, such as principle component regression or partial-least squares regressions can also be used to correlate the concentration of the reactor constituents or polymer properties to the spectral intensities. The above described irradiation/analysis cycle may be repeated between every 5 seconds to 1,000 seconds or as otherwise desired.

Data from the analyzer 122, such as the concentration of hydrogen in the liquid phase (which may also be referred to as the "dissolved hydrogen concentration"), may be conveyed via conduit 124 to the reactor control system 106. As previously described, the processor in the control system 106 can compare the preset upper and lower limits for reactor constituent concentrations and the flow of these reactor constituents into the reactor vessel 102 with the data from the analyzer 122 and adjust or meter the flow thereof accordingly.

For example, in the case of an olefin slurry loop polymerization reactor, hydrogen can serve as a polymer chain transfer agent. In this way, the molecular weight of the polymer product can be controlled. Additionally, varying the hydrogen concentration in olefin polymerization reactors can also vary the polymer melt flow rate (MFR). In some instances, customers may specify a very

narrow polymer MFR range for their product(s). The present invention allows the polymer manufacture to produce polymer having a selected MFR range. This is accomplished by knowing the relationship between hydrogen concentration and the MFR of polymers produced by a specific reactor and programming the target MFR or MFR range into the control system 106 processor. By monitoring the hydrogen concentration data generated by the analyzer system 104 and comparing this data to the upper and lower limits of the target MFR range, the flow of hydrogen into the reactor vessel 102 may be metered so that the MFR range of the polymer product may remain compliant with the target MFR range.

While the above example is specific to hydrogen concentration and polymer MFR, it will be understood by those skilled in the art that other reactor constituent properties and reactor constituent concentrations measured in the reactor vessel may also be correlated to final polymer properties. In a similar way as described above, the final polymer properties may be achieved by controlled metering of these reactor constituents into the reactor vessel 102 in response to data generated by the analyzer system in concert with an appropriately programmed processor (programs which are readily available or which are known to or can be created by those skilled in the art). For example, in the article titled, "Modelling Of The Liquid Phase Polymerization Of Olefins In Loop Reactors" by Zacca and Ray which appears in Chemical Engineering Science, Vol. 48, No. 22 page 3743) and the article entitled "Moving-Horizon State Estimation Applied to an Industrial Polymerization Process" by Louis P. Russo and Robert E Young which appears in the American Control Conference Proceedings, 1999, San Diego, CA, both of which are incorporated by reference herein in their entirety, mathematical models are provided for describing the dynamics of the polymerization of olefins in a slurry loop reactor. One skilled in the art will recognize that the teachings in these articles are not catalyst specific and are applicable for use with the present invention as well a for use in describing and/or understanding the dynamics of a slurry loop reactor employing, for example, one or more metallocene catalysts systems.

17

Turning now to Figure 2, a fiber optic probe assembly 126 secured to the reactor vessel wall 128 by engaging flanges 129 is illustrated. The fiber optic probe assembly 126 extends for a distance into the interior 130 of the reactor vessel 102a. The fiber optic probe assembly 126 includes a probe housing 132 having a first end 134 and second end 136 and portions defining a probe channel 138 (illustrated in ghost) sized for slidably receiving a probe 139, desirably formed from stainless steel. The probe 139 includes a fiber optic channel 155 (Figure 3) sized for receiving the center fiber optic transmission conduit and the fiber optic receiving conduits described above. The transmission and receiving fiber optic conduits are generically illustrated in Figure 2 by the structure identified by the reference number 143. The center fiber optic transmission conduit and the fiber optic receiving conduits 143 terminate at the probe tip 152 (Figure 3). The probe channel 138 extends substantially the length of the probe housing 132 between the first and second ends 134 and 136, respectively. Between the first and second ends 134 and 136, respectively, a pair of ball valves 140a and 140b are secured to the probe housing 132 and are aligned with the probe channel 138. The probe 139 enters the probe housing 132 through a re-sealable fitting 141. The probe 139 may be extended, retracted or selectively positioned within the probe channel 138 by a probe insertion assembly 142.

The probe insertion assembly 142 is secured to the second end 136 of the probe housing 132. The probe insertion assembly 142 includes a guide rod 144, a plate 146 moveably secured to the guide rod 144 and to a threaded rod 148 for selectively positioning and securing the plate 146 along the length of the guide rod 144. A connection 150 secures one end of the probe 139 to the plate 146.

While the analyzer system 104 does not require continuous and/or simultaneous correlation or calibration of the reactor constituent data with data obtained from an irradiated reference material, calibration of the analyzer system, from time to time, may be desirable. Calibration of the analyzer system 104 may be preformed by positioning the probe tip 152 (Figure 3) between ball valve 140b and the second end 136 of the probe housing 132. In this way, the ball valves

JB

140a and 140b may be rotated to interrupt contact between the reactor constituents and the irradiating and collecting ends of the transmission and receiving conduits 143. The ball valves 156a and 156b may be rotated to isolate a flow of purging fluid, such as liquid propylene, in a conduit 158 from entering a calibration material conduit 160. The calibration material conduit 160 communicates with a calibration material source 162 and a portion of the probe channel 138 that is defined by the portion of the probe housing 132 between the ball valve 140b and the second end 136. In this way, a reference material may be segregated from the reactor constituents when the analyzer system 104 is being calibrated or its accuracy checked.

Calibrating the analyzer system 104 may be performed by contacting the irradiating and collecting ends of the transmission and receiving conduits 143 at the probe tip 152 (Figure 3) with a quantity of the reference material. The reference material is irradiated and the energy scattered by the reference material is collected. The reference material data is processed in the same manner as the reactor constituent data except that the reference data obtained during calibration is compared to known data for the reference material.

Selection of the reference material for calibration may, in some instances, depend upon the reactor constituent(s) being investigated and/or monitored. For example, as described above, when monitoring the concentration of hydrogen in the reactor vessel for purposes of controlling the MFR of polymer product, it may be desirable to select reactor grade hydrogen as one of the reference materials to calibrate the analyzer system 104.

Referring now to Figure 3, an enlarged view of a portion of the probe 139 which rests in the probe channel 138 adjacent the first end 134 is illustrated. Slightly rearward of the probe tip 152 in a direction towards the second end 136 (not shown), the cross sectional area of the probe 139 increases in a flared section 154. The flared section 154 facilitates the sealing of the probe 139 within the probe channel 138. The fiber optic channel 155 extends the length of the probe


14

139 and is sized for receiving the fiber optic transmitting and receiving conduits 143.

When the analyzer system 104 is used for investigating and/or monitoring the concentration of hydrogen in a slurry loop, propylene polymerization reactor, specific, non-limiting examples of suitable analyzer system components include: a Kaiser HoloProbe Process Raman Analyzer, manufactured by Kaiser Optical Systems, Inc. of Ann Arbor, MI, a Visible 400mW, 532nm solid state Diode-pumped frequency YAG laser, manufactured by Coherent, Inc and supplied by Kaiser Optical Systems, and a Visonex Captron Probe, manufactured by Visionex, Atlanta GA.

Additionally, it is desirable, but not necessary, that the fiber optic probe assembly 126 meet the following minimum particular specifications: operating conditions of 600 psig (41.36 bars) and 165°F (73.9°C), design conditions of 700 psig (48.25 bars) and temperatures in the range of from -49°F (35°C) to 302°F (150°C). Furthermore, it is desirable that the optic probe assembly 126, including fiber optics, epoxy and related components, sustain without loss of integrity: (i) exposure to light hydrocarbons and TEAL ( $(C_2H_5)_3Al$ ) at concentration in the range of from 0.01 to 500 ppm; (ii) thermal cycling from 0°C to 100°C over a one hour period. It is also desirable that the fiber optic cables (the transmission conduit and the receiving conduits) be secured within and throughout the length of the probe 139.

The above description illustrates the use of an analyzer system employing a single probe for analyzing one or more reactor constituents. It will be understood by those skilled in the art that the analyzer system may be configured to include more than one probe which may be located at one or more locations along the reactor vessel. Additionally, in the case of multistage reactors, the analyzer system may be configured to include probes located at one or more locations along one or more reactors. In this way, one or more reactor constituents may be analyzed at one or more locations within the overall process and particularly, the overall olefin polymerization process.



## Examples

The following examples are presented to illustrate the foregoing discussion. Although the examples may be directed to certain embodiments of the present invention, they are not to be viewed as limiting the invention in any specific respect. The equipment used and the experimental procedure employed to obtain the data in the following tables and figures are outlined below.

## Equipment

The apparatus used in the hydrogen concentration and polymer properties experiments is schematically illustrated in Figure 4. The equipment consisted of the following major components:

A Kaiser Holoprobe 532 Raman Spectrometer

A 200 mW 532 nm Solid State YAG Laser

Visionex Captron Probe with integral 532 nm notch filter

Low-Hydroxyl Silica Fiber Optic Cables

A Gateway GS-400 Computer used to control spectrometer and record spectra.

Stirred Vessel with Pressure Measurement/Control

## Experimental Procedure

The Hydrogen concentration experiment was designed to provide a simulation of slurry loop reactor conditions. Pentane was substituted for propylene because of simpler handling requirements. Hydrogen concentration experiments were conducted in order to determine the sensitivity level of the hydrogen measurement. The polymer properties experiment simply consisted of acquiring Raman spectra of polypropylene granules. They are described in more detail below.

Weighed amounts of polypropylene granules and pentane were added to the vessel to create a slurry of known concentration. The vessel was then sealed, purged with nitrogen, and agitation was established. Hydrogen was then added to

112



the system to achieve desired system pressure. At each pressure level, Raman spectra were collected and recorded in a manner similar as described above. The system pressure was used to estimate hydrogen concentration. This was repeated for several slurry concentration levels.

The polymer property experiment utilized the Raman probe, spectrometer and related equipment, but consisted of simply placing the Raman probe in a plastic bag containing Polypropylene granules and acquiring spectra.

### Example 1 - Hydrogen Concentration

Hydrogen exhibits a peak at a Raman shift of  $4140\text{ cm}^{-1}$ . This hydrogen peak along with two peaks from the pentane solvent (at  $1361\text{ cm}^{-1}$  and  $2735\text{ cm}^{-1}$ ) were used for the hydrogen concentration measurement. These are shown in Figures 5a and 5b.

The pentane peaks were used in order to establish the hydrogen measurement as a ratio against other major components. This method provides a means of correcting the hydrogen prediction for changes in scattering intensity caused for example, by changing polymer concentration. Desirably, in polyolefin field reactors, measurement of hydrogen will also use one or more bands from the monomer and polymer. The area under each band (or peak) was integrated using Grams 32 data analysis software. The peak areas were used to develop a hydrogen concentration prediction equation of the form:

$$H_2 (\text{ppm}) = a_1 * A_{4138} + a_2 * (A_{4138}/A_{1361}) + a_3 * (A_{4138}/A_{2735}) + C$$

where:  $A_n$  are the Peak Areas

$a_1..a_3$  are the regression coefficients

$C$  is a constant

A plot of estimated hydrogen concentration versus Raman predicted hydrogen is shown in Figure 6.

### Example 2 - Hydrogen Measurement Sensitivity

17

The determination of hydrogen measurement sensitivity was conducted using a certified blend of hydrogen in propylene liquid. Several Raman spectra were collected, and the repeatability of the analysis was used to establish the lower limit of hydrogen measurement sensitivity. This value is assumed to be the upper level of sensitivity to hydrogen as the presence of polymer granules will have a negative impact on the measurement. The impact of polymer granules on sensitivity to hydrogen was evaluated by observing the impact on a surrogate compound (acetonitrile) in a pentane/polypropylene slurry. A surrogate in pentane was used to simplify handling in the laboratory. It is believed that the results for hydrogen in propylene will be similar. The calculations are shown below:

#### Calculation Of Measurement Sensitivity/Repeatability

Table 1 reports the results from 240 parts per million ("ppm") Hydrogen in Propylene repeatability test.

Table 1

No.	Peak Ht.
1	101.05
2	103.39
3	108.54
4	110.18
5	112.24
6	114.84
7	108.46
Avg.	108.39
Stdev.	4.81

An estimate of the repeatability in ppm H<sub>2</sub> (also the standard deviation in ppm of H<sub>2</sub>) of the instrument can be made using the standard deviation of the seven sequential measurements.

$$\begin{aligned}\text{Repeatability (ppm H}_2\text{)} &= (4.81/108.39) \times 240 \text{ ppm} \\ &= 10.6 \text{ ppm H}_2\end{aligned}$$

The minimum detectable limit can be estimated at three times the standard deviation in ppm of  $H_2$  of the measurement.

$$\text{Minimum Detectable} = \sim 3 \times \text{Std. Dev. in ppm of } H_2$$

As such, the minimum detectable limit in propylene liquid using the above equipment configuration equals approximately 33 ppm  $H_2$

### Impact of Polymer Slurry on $H_2$ Measurement Sensitivity/Repeatability

Figure 7 illustrates the expanded spectra of acetonitrile in a polypropylene/pentane slurry at several polymer concentrations. As can be seen from Figure 7 above, the acetonitrile peak at 50% polypropylene slurry is approximately 50% the size of the peak with no polymer present. Assuming that a 50% slurry similarly depresses the hydrogen peak size by 50 %, then the estimated hydrogen sensitivity is as follows:

Taken from above that Hydrogen measurement repeatability/sensitivity in propylene liquid is 10.6/ 33 ppm  $H_2$ , then:

$$H_2 \text{ Repeatability (at 50\% polymer)} = 10.6 \text{ ppm} / 0.5 = 22 \text{ ppm } H_2$$

$$H_2 \text{ Sensitivity (at 50 \% polymer)} = 33 \text{ ppm} / 0.5 = 66 \text{ ppm } H_2$$

### Example 3 - Polymer Properties Measurement

The measurement of polypropylene properties such as MFR was based on the correlation of Raman spectra collected from polypropylenes with known (as determined by a primary method such as NMR or a Rheometer) properties.

### Spectral Modeling for MFR

Each individual spectra taken is represented by an array of approximately 4400 frequency vs. intensity values. (1 row with 4400 columns). For a model set with 20 samples, this produces a data array with a dimension of 20 rows by 4400 columns.

19

To successfully produce a prediction model from this data array, it is necessary to first reduce the size of the data set. This was accomplished using Principal Components Analysis (PCA). PCA reduces this large data set to a number of covariant orthogonal vectors referred to as a Principal Components or PCs'. Each PC contains the covariant (correlated) data contained in the data set. The first PC represents the highest valued covariant behavior, with each PC in descending order representing lower intensity (intensity value) information

Each spectra is then assigned a "score" for each PC. The score is the amount of each principal component found in the spectra. The scores represent the independent variables that are regressed against properties of interest in order to produce a prediction model. The regression of the scores produced a "regression vector" with a coefficient for each intensity value utilized.

The form of the predictive equation is :

$$\text{predicted value} = k_{\lambda_1} A_{\lambda_1} + k_{\lambda_2} A_{\lambda_2} + \dots + k_{\lambda_n} A_{\lambda_n}$$

where:  $A_{\lambda_n}$  is the absorbance at the  $n^{\text{th}}$  frequency

$k_{\lambda_n}$  is the regression coefficient for the  $n^{\text{th}}$  frequency

### MFR Prediction

MFR prediction models were developed on polypropylene granules samples previously characterized in the lab in accordance with ASTM D-1238-95 Procedure B. It has been found that it is necessary to create separate prediction models for homopolymers and copolymers.

Both the homopolymers and copolymer models had the following characteristics: (i)  $271\text{cm}^{-1}$  to  $1913\text{cm}^{-1}$  Raman shift, (ii) Developed by PCA/PLS and (iii) 4 Principal Components used in regression.

A Raman spectrum of polypropylene granules is shown below in Figure 8. The frequency region used is illustrated on the plot.

Figure 9 illustrates a parity plot of Raman predicted MFR versus Lab MFR. The Standard Error of Cross Validation (SEV) is as follows:

Homo-polymers: 0.32 MFR

### Copolymers: 0.41 MFR

As can be seen from the Figure 9, spectroscopic analysis, and particularly Raman analysis can be used to predict MFR of polypropylene granules.

While the present invention has been described and illustrated by reference to particular embodiments, it will be appreciated by those of ordinary skill in the art that the invention lends itself to many different variations not illustrated herein. For these reasons, then, reference should be made solely to the appended claims for purposes of determining the true scope of the present invention.

### Example 4 - Raman Spectroscopy Sensitivity to Ethylene and 1-Hexene In a Simulated Slurry Loop Reactor

The apparatus used in this simulation include of the following major components:

A Kaiser HoloLab 5000 Raman Spectrometer

A NIR 785nm/250mW External Cavity Wavelength Stabilized Laser Diode

A imaging style optic, immersion probe with holographic probe head filter (Figure 16), available from Kaiser Optical Systems, probe head model number HFPH-FC-S-785, immersion optic model number IMO-H-0.1

A fiber optic cable (4 fibers)

A PC with software to control spectrometer and collect/analyze spectra

A stirred vessel with pressure measurement

### Experimental Procedure

The experiment simulated slurry loop reactor conditions. Isopentane was substituted for the isobutane diluent for ease of handling. The vessel was first charged with isopentane and high-density polyethylene granules at a ratio similar to slurry loop reactor conditions. The vessel was then sealed and stirred

21

throughout the experiment. To this slurry, aliquots of 1-hexene were added volumetrically. Spectra were collected before and after each addition of hexene.

After completing the 1-hexene additions, ethylene was then added to the slurry. Ethylene gas was feed to the vessel and quantitated by weighing the ethylene delivery cylinder. The ethylene gas pressurized the reaction vessel and was forced into solution by pressure and stirring agitation.

1-hexene exhibits a peak at a Raman shift of 1640  $\text{cm}^{-1}$ . Ethylene exhibits a peak at a Raman shift of 1620  $\text{cm}^{-1}$ . Figure 10 illustrates the expanded spectra of these peaks in the slurry system. These peaks were used for the concentration measurements. The relationship between the peak height of the 1-hexene peak versus hexene concentration is shown in Figure 11. The relationship between the peak height of the ethylene peak versus ethylene concentration is shown in Figure 12.

It is clear, in view of the Figures 10-12 and the above discussion, that ethylene and 1-hexene concentrations at in typical slurry loop reactor environment can be determined by Raman spectroscopy.

#### **Example 5 - On-Line Validation of Raman Spectroscopy for Ethylene and Polyethylene Copolymer. Prophetic Example of Hexene Concentration Measurements**

The apparatus used in Example 5 include of the following major components:

A Kaiser HoloLab 5000 Raman Spectrometer

A NIR 785nm/250mW External Cavity Wavelength Stabilized Laser Diode

A imaging style optic, immersion probe with holographic probe head filter, available from Kaiser Optical Systems, probe head model number HFPH-FC-S-785, immersion optic model number IMO-H-0.1

A 100 meter, jacketed fiber optic cable (4 fibers)

A PC with software to control spectrometer and collect/analyze spectra

A commercial slurry-loop, polyethylene reactor system

### Experimental Procedure

5           The imaging probe was inserted directly into the slurry-loop reactor. Spectrum was collected as the reacting slurry flowed past the imaging probe tip. Figure 13 exhibits the expanded Raman spectra collected from the slurry polyethylene copolymer reaction system.

### 10           Ethylene Concentration Measurements

          Ethylene concentrations were measured during a typical commercial polyethylene production run in the above commercial slurry loop reactor system operated at 550 psi, approximately 100 degrees C, with ethylene as the primary monomer and 1-hexene as the comonomer. For the analysis, the area of the  
15           known peak for the ethylene was divided by the area of an isolated isobutane peak (the reference peak). The result is the ethylene peak ratio. The peak ratio results were then compared to the results from the current ethylene measurement produced by a downstream gas chromatograph. Figure 14 shows the relationship between the ethylene peak ratio and the gas chromatograph ethylene  
20           concentration measurement.

          Based upon the peak ratio technique, the ethylene concentration prediction equation is as follows:

$$\text{Ethylene (wt\%)} = X * (A_{1620} / A_{796}) + C$$

25

X = slope of linear regression

An = peak areas

C is a constant

23

It is clear, in view of Figure 13 and 14 and the above discussion, that the ethylene concentration may be predicted within acceptable variations within a commercial loop slurry reactor.

### Hexene Concentration Measurements

Due to reaction conditions, the 1-hexene peak at a Raman shift of 1640 cm<sup>-1</sup> is generally not acceptable for the peak ratio technique. However, spectral modeling can offer a solution. For example, each spectra may be treated as an array of Raman shift (frequency) versus intensity values. The arrays of values from multiple spectra can be assembled to produce the matrix for chemometric analysis. Partial Components Analysis (PCA) and Partial Least Squares (PLS) can be used for the model creation. Using the information in the spectral range from 1580cm<sup>-1</sup> to 1700cm<sup>-1</sup>, an effective model for hexene concentration (as indicated by the downstream gas chromatograph) can be produced.

### Polyethylene Copolymer Concentration Measurements

Polyethylene copolymer concentrations were measured during a typical commercial polyethylene production run in the above commercial slurry loop reactor system operated at 550 psi, approximately 100 degrees C, with ethylene as the primary monomer and 1-hexene as the comonomer. Figure 15 illustrates a correlation between the Raman polyethylene copolymer peak ratio and the slurry density/polyethylene copolymer concentration in the commercial slurry loop system.

Based upon the peak ratio technique, the polyethylene copolymer concentration at the probe tip can be calculated. This prediction can be compared to the results of the reactor's on-line nuclear density analysis instrumentation. The prediction equation is as follows:

$$\text{Slurry Density (polymer concentration)} = X * (A_{1295} / A_{796}) + C$$

24



$X$  = slope of linear regression

$A_n$  = peak areas

$C$  is a constant

5           While the present invention has been described and illustrated by  
reference to particular embodiments, it will be appreciated by those of ordinary  
skill in the art that the invention lends itself to many different variations not  
illustrated herein. For these reasons, then, reference should be made solely to the  
appended claims for purposes of determining the true scope of the present  
10           invention.

          Although the appendant claims have single dependencies in accordance  
with U.S. patent practice, each of the features in any of the appendant claims can  
be combined with each of the features of other appendant claims or the main  
claim.

CLAIMS

1. A method of olefin polymerization in a slurry reactor containing reactor constituents having a liquid phase comprising:
- 5 irradiating in-situ the reactor constituents;  
measuring scattered energy from the irradiated reactor constituents;  
determining a concentration of one or more reactor constituents;  
and  
metering a flow of at least one reactor constituent into the reactor in  
10 response to the determined concentration.
2. The method of claim 1 wherein the determining step is performed on at least one reactor constituent in the liquid phase.
- 15 3. The method of claim 2 wherein at least one of the reactor constituents in the liquid phase is hydrogen.
4. The method of claim 1 wherein the reactor constituents are circulated in the reactor.
- 20 5. A method of polymerizing a polyolefin in a slurry reactor containing reactor constituents comprising:  
irradiating in-situ a slurry;  
measuring scattered energy from the slurry;  
25 determining from the measured scattered energy a concentration of one or more reactor constituents;  
comparing the concentration of one or more reactor constituents with one or more values that correlate to one or more selected physical properties of the polyolefin; and

2A

metering, in response to the comparing step, a flow of one or more reactor constituents into the reactor.

6. The method of claim 5 wherein the determining step is performed on at least one reactor constituent in a liquid phase of the slurry.

7. The method of claim 6 wherein at least one of the reactor constituents in the liquid phase is hydrogen.

8. The method of claim 5 wherein at least one of the selected physical properties of the polyolefin is a melt flow rate.

9. The method of claim 8 wherein the flow of one or more of the reactor constituents into the reactor is metered such that the polyolefin produced may be defined, in part, by a melt flow rate value within a selected melt flow rate range.

10. A method of polymerizing a polyolefin in a reactor containing reactor constituents in liquid phase comprising:

irradiating in-situ the liquid phase;

measuring the frequencies scattered by the irradiated liquid phase;

determining from the measured frequencies a concentration of one or more reactor constituents;

comparing the concentration of one or more reactor constituents with one or more values that correlate to one or more selected physical properties of the polyolefin; and

metering, in response to the correlating step, a flow of one or more reactor constituents into the reactor.

11. The method of claim 10 wherein one of the selected physical properties of the polyolefin is a melt flow rate value within a selected melt flow rate

26

range and wherein the flow of one or more reactor constituents into the reactor is metered such that the polyolefin produced may be defined, in part, by a melt flow rate value within the melt flow rate range.

12. A method of polymerizing a polyolefin in a slurry loop reactor containing reactor constituents, including hydrogen, in a liquid phase comprising:

irradiating in-situ the liquid phase;

measuring the frequency scattered by the hydrogen in the liquid phase;

determining the concentration of hydrogen in the liquid phase from the measured frequency;

comparing the concentration of hydrogen to a hydrogen concentration value that correlates to a melt flow rate value within a selected melt flow rate range; and

metering, in response to the concentration of hydrogen measured, a flow of the hydrogen into the reactor such that the polyolefin produced may be defined, in part, by a melt flow rate value within the selected melt flow rate range.

13. A method of polymerizing a polyolefin in a slurry reactor containing reactor constituents comprising a liquid phase and a solid phase forming a slurry reaction mixture, said method comprising:

irradiating in-situ at least a portion of the slurry reaction mixture;

measuring scattered energy from the slurry;

determining from the measured scattered energy a concentration of one or more reactor constituents;

controlling the flow of one or more reactor constituents into the reactor based on the concentration of one or more reactor constituents.

29

14. The method of claim 13 wherein the one or more reactor constituents in said determining step are the same as said one or more reactor constituents in the controlling step.
- 5 15. The method of claim 13 wherein at least one of the one or more reactor constituents in said determining step is different from said one or more reactor constituents in the controlling step.
- 10 16. The method of claim 13 wherein the concentration determined is that of ethylene in the liquid phase of a slurry reaction mixture.
- 15 17. The method of claim 13 wherein the measured concentration of ethylene and at least one other alpha-olefin copolymer in the liquid phase of a slurry reaction mixture are used to control the ratio of one or more reactor constituents into the reactor.
- 20 18. The method of claim 13 wherein the measured concentration of polymer in the solid phase of a slurry reaction mixture is used to control the flow of one or more reactor constituents into the reactor.
19. The method of claim 13 wherein the flow controlled is diluent.
- 30

RAMAN ANALYSIS SYSTEM FOR  
OLEFIN POLYMERIZATION CONTROL

ABSTRACT

5

10

Method of olefin polymerization in a reactor, such as a slurry loop olefin polymerization reactor, is provided. The method includes conducting in-situ, real time spectroscopic analysis of one or more reactor constituents. The reactor constituents analyzed may be present in the reactor in either the liquid phase or the solid phase, or both. In response to the measured in-situ values, one or more reactor constituents may be metered into the reactor.

11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889  
1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051  
2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105  
2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2141  
2142  
2143  
2144  
2145  
2146  
2147  
2148  
2149  
2150  
2151  
2152  
2153  
2154  
2155  
2156  
2157  
2158  
2159  
2160  
2161  
2162  
2163  
2164  
2165  
2166  
2167  
2168  
2169  
2170  
2171  
2172  
2173  
2174  
2175  
2176  
2177  
2178  
2179  
2180  
2181  
2182  
2183  
2184  
2185  
2186  
2187  
2188  
2189

**Fig. 1**

102a

102b

104

112 ENERGY SOURCE

114

116

118 SPECTRUM CONVERTER

120

122 ANALYZER

124

106 REACTOR CONTROL SYSTEM

107

108

100

Fig. 3

152, 154, 156, 139

Fig. 4

# HYDROGEN IN POLYPROPYLENE SLURRY EXPERIMENTAL SETUP


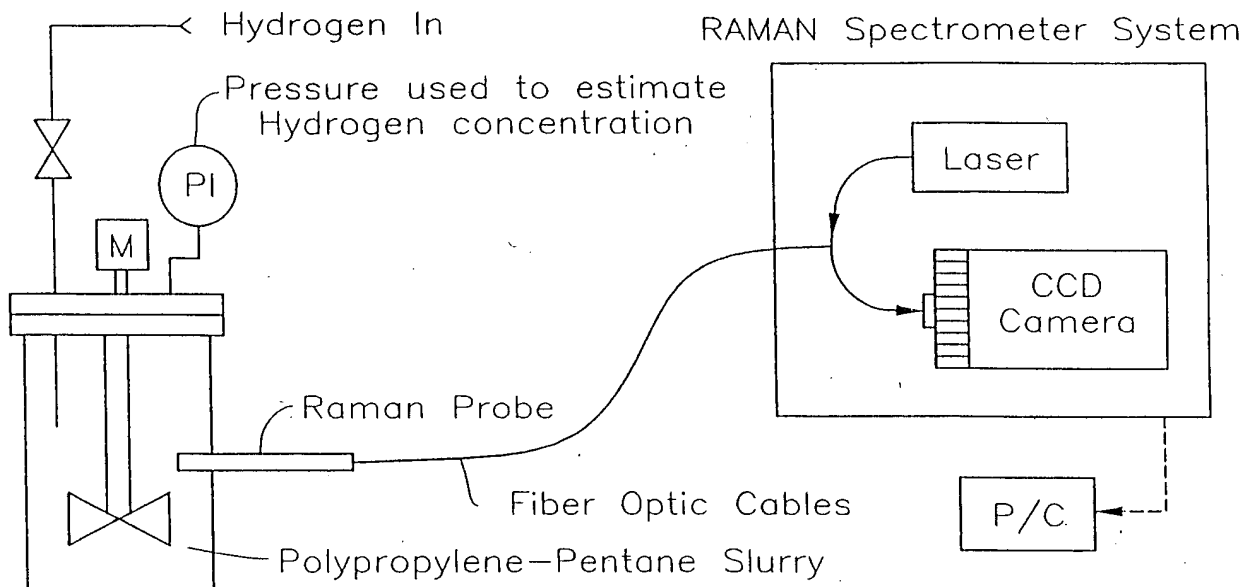


Fig. 5a

## Raman Spectra of Pentane/Polypropylene Slurry

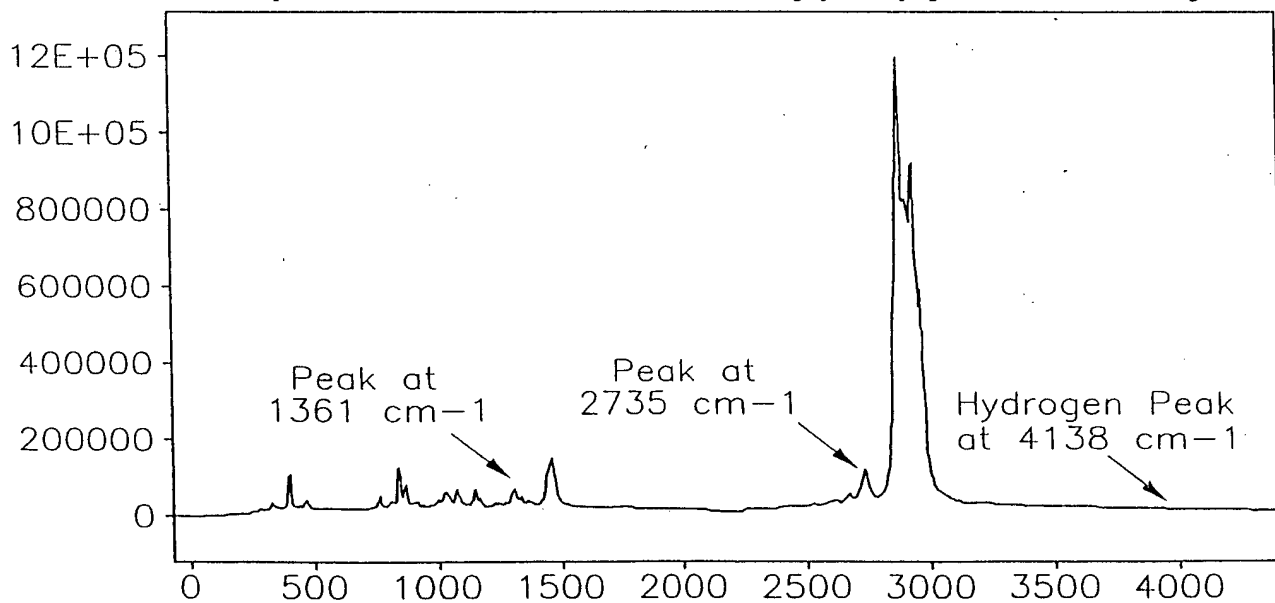

Arbitrary Y/Raman Shift (cm-1)

File#1=V5H23001

0 psi, Fresh Pentane, vex 2a probe,  
24.5 °C, polymer sample 310020,  
2.34 MFR, appr

Overlay Z-Zoom CURSOR

12/16/97 2:41 PM Res=None



Fig. 5b

### Expanded View of Hydrogen Peak Area


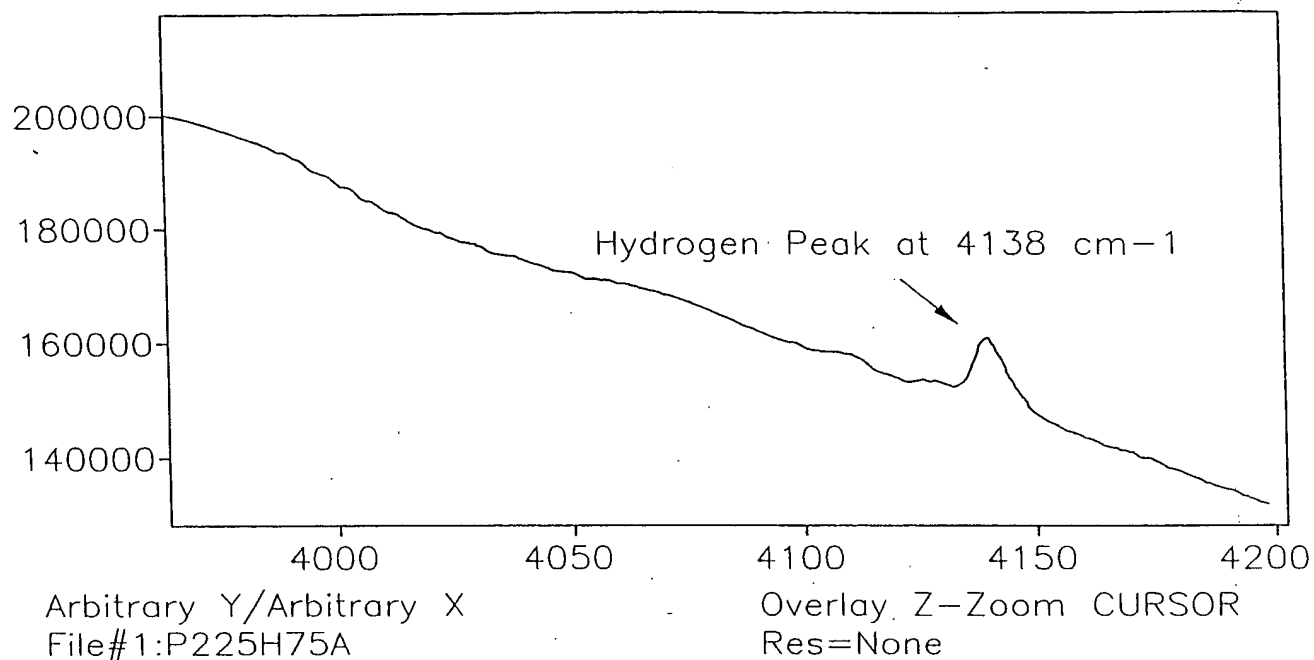


Fig. 6


### Estimated (by press.) Hydrogen Conc. vs. Predicted Hydrogen Conc. for 25% and 35% wt PP Slurry

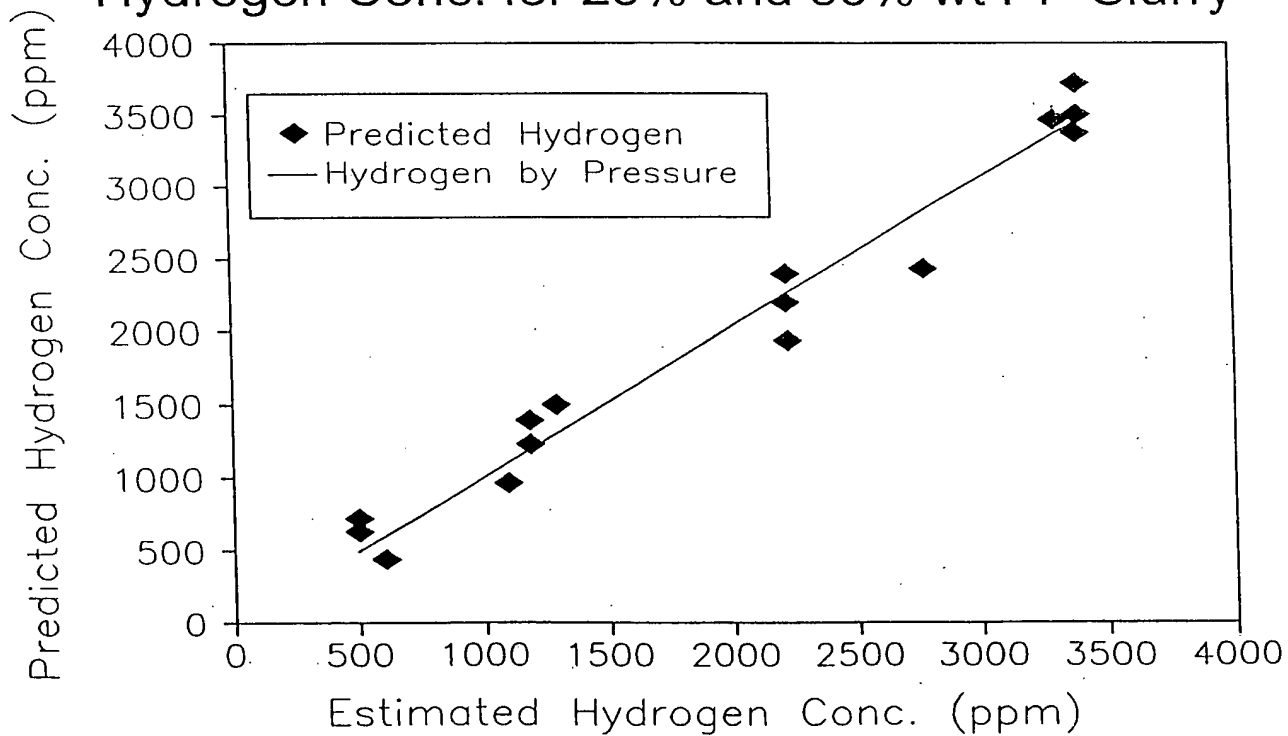

4/5

Fig. 7

Expanded Spectra of acetonitrile in pentane,  
showing impact of polymer on peak size

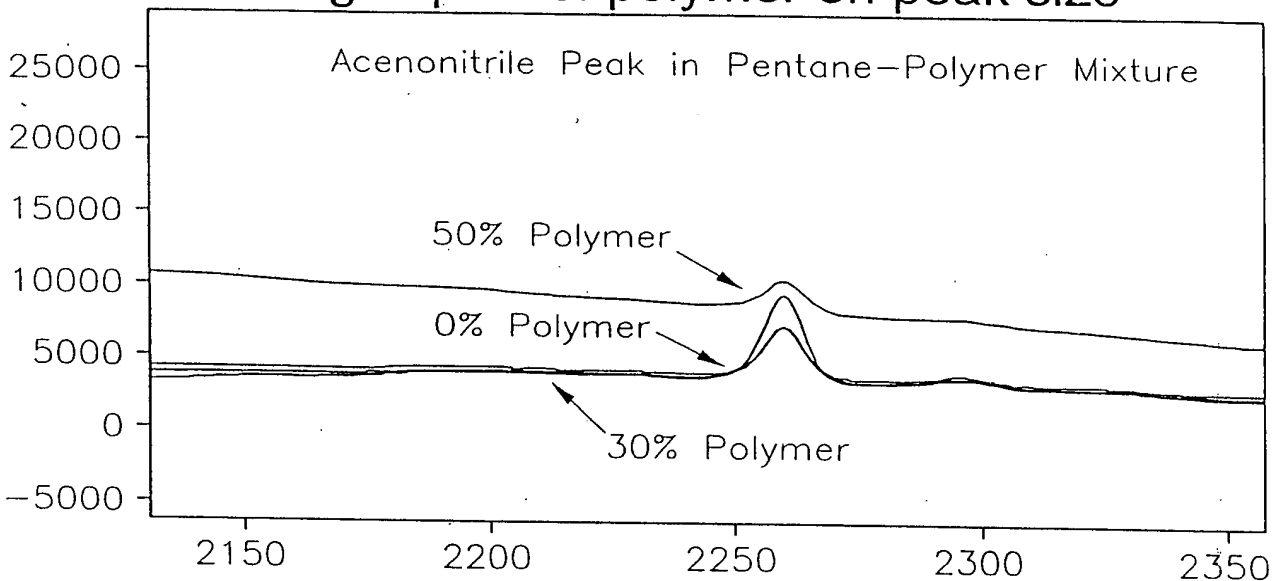


Arbitrary Y/Raman shift (cm-1)  
File #5=AN\_6015  
Acetonitrile in pentane, 30% polymer,  
vex 1a probe; glass vessel

Overlay Y-Zoom CURSOR  
12/18/97 12:04 PM  
Res=None

Fig. 8

Raman Spectrum of Polypropylene Granules

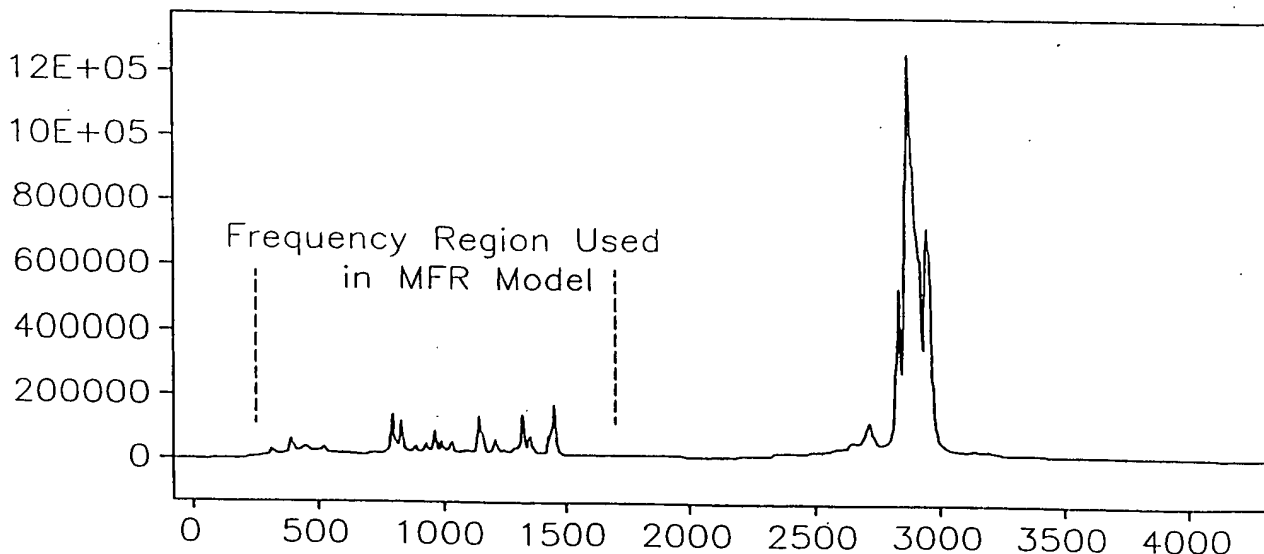



Arbitrary Y/Raman Shift (cm-1)  
File #1=POLY0023  
sample 23

Overlay Y-Zoom CURSOR  
12/17/97 4:09 PM Res=None

5/5


Fig. 9

Raman Predicted vs. Lab MFR

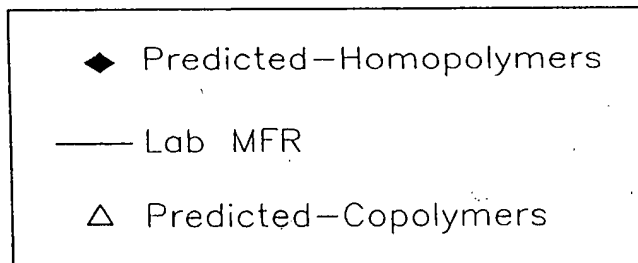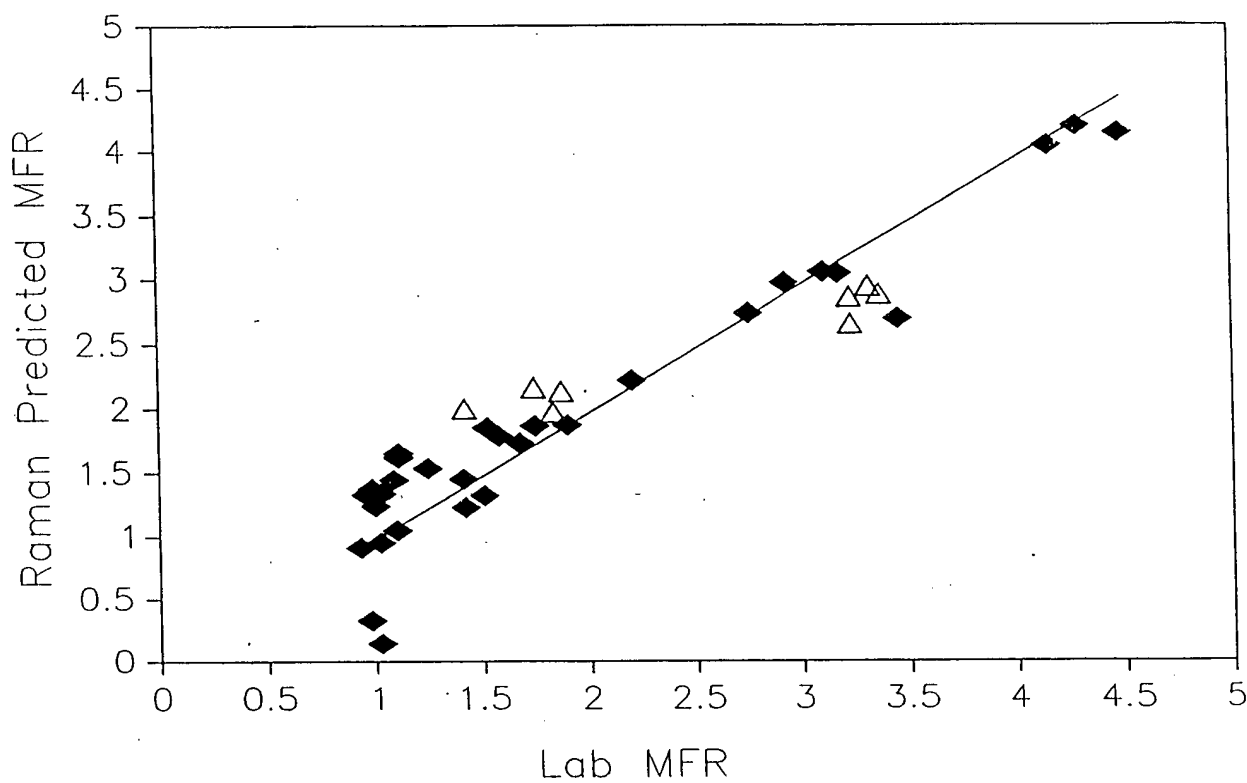


PRINT OF DRAWINGS  
AS ORIGINALLY FIL

Figure 10

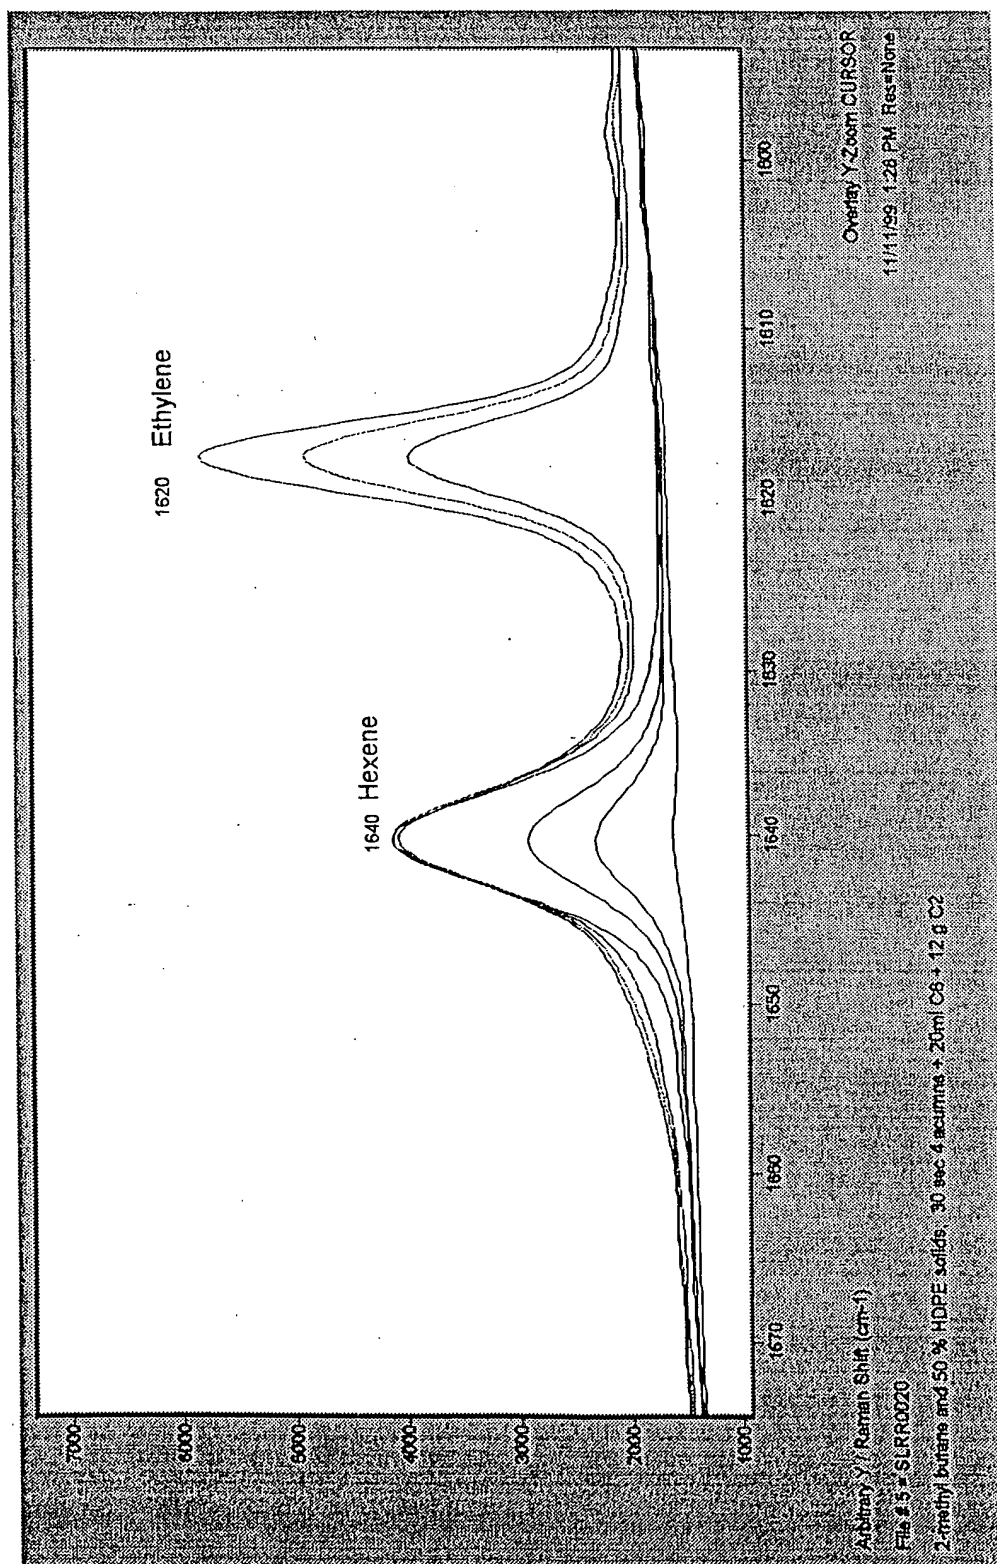


PRINT OF DRAWINGS  
AS ORIGINALLY FILED

Figure 11

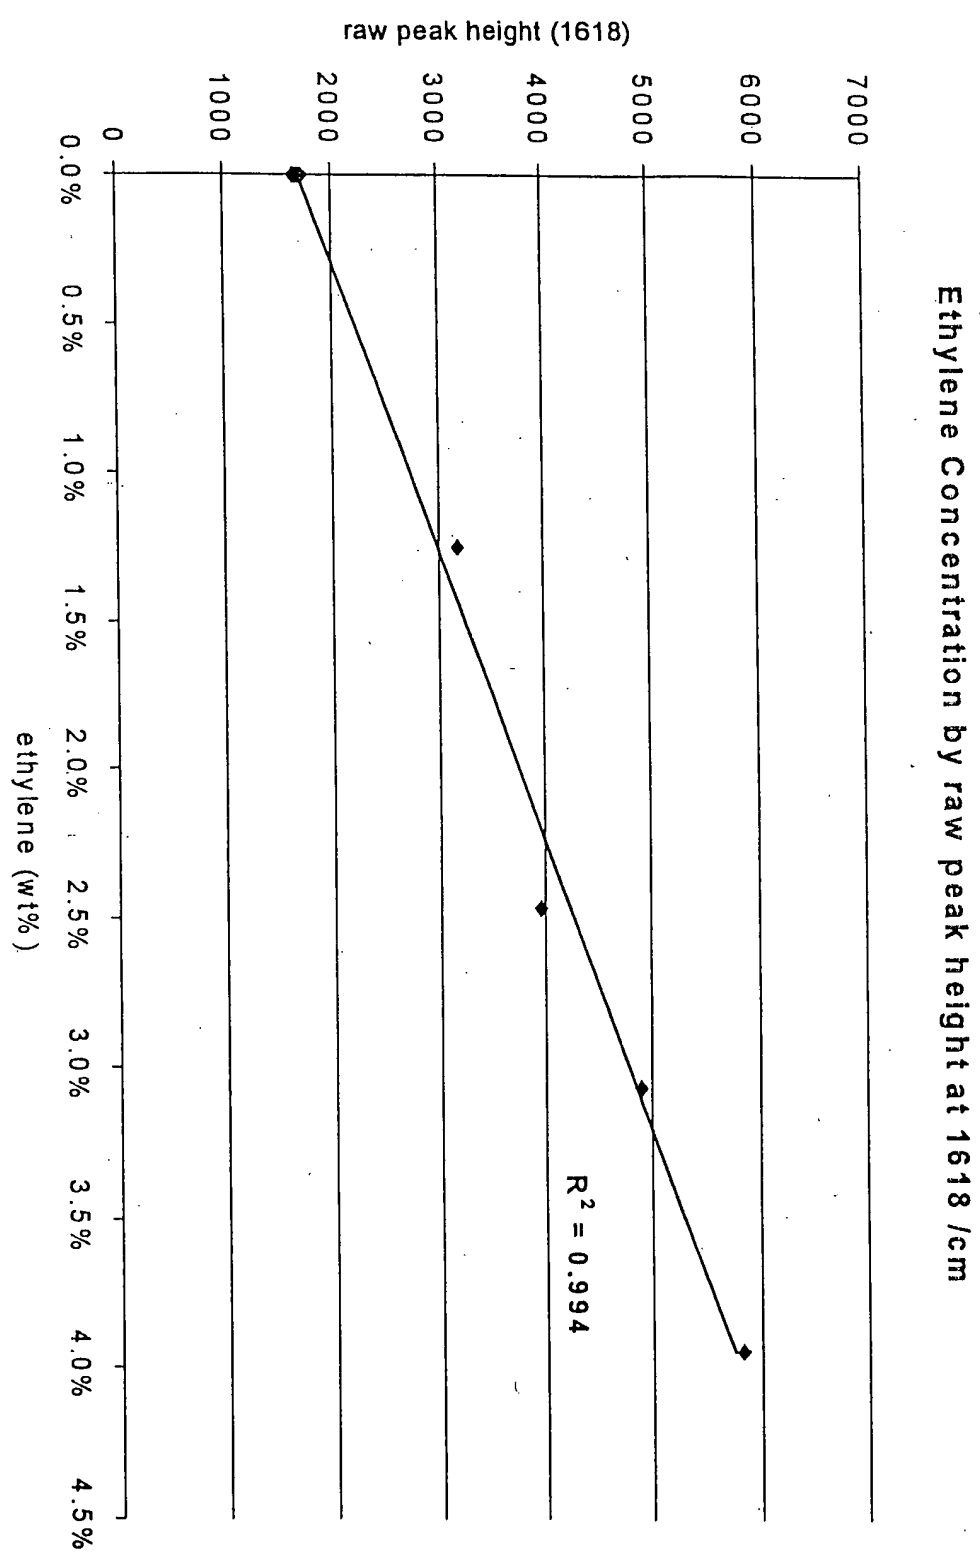


0.00 0.05 0.10 0.15 0.20 0.25 0.30 0.35 0.40 0.45 0.50 0.55 0.60 0.65 0.70 0.75 0.80 0.85 0.90 0.95 1.00 1.05 1.10 1.15 1.20 1.25 1.30 1.35 1.40 1.45 1.50 1.55 1.60 1.65 1.70 1.75 1.80 1.85 1.90 1.95 2.00 2.05 2.10 2.15 2.20 2.25 2.30 2.35 2.40 2.45 2.50 2.55 2.60 2.65 2.70 2.75 2.80 2.85 2.90 2.95 3.00 3.05 3.10 3.15 3.20 3.25 3.30 3.35 3.40 3.45 3.50 3.55 3.60 3.65 3.70 3.75 3.80 3.85 3.90 3.95 4.00 4.05 4.10 4.15 4.20 4.25 4.30 4.35 4.40 4.45 4.50

**Ethylene Concentration by raw peak height at 1618 /cm**

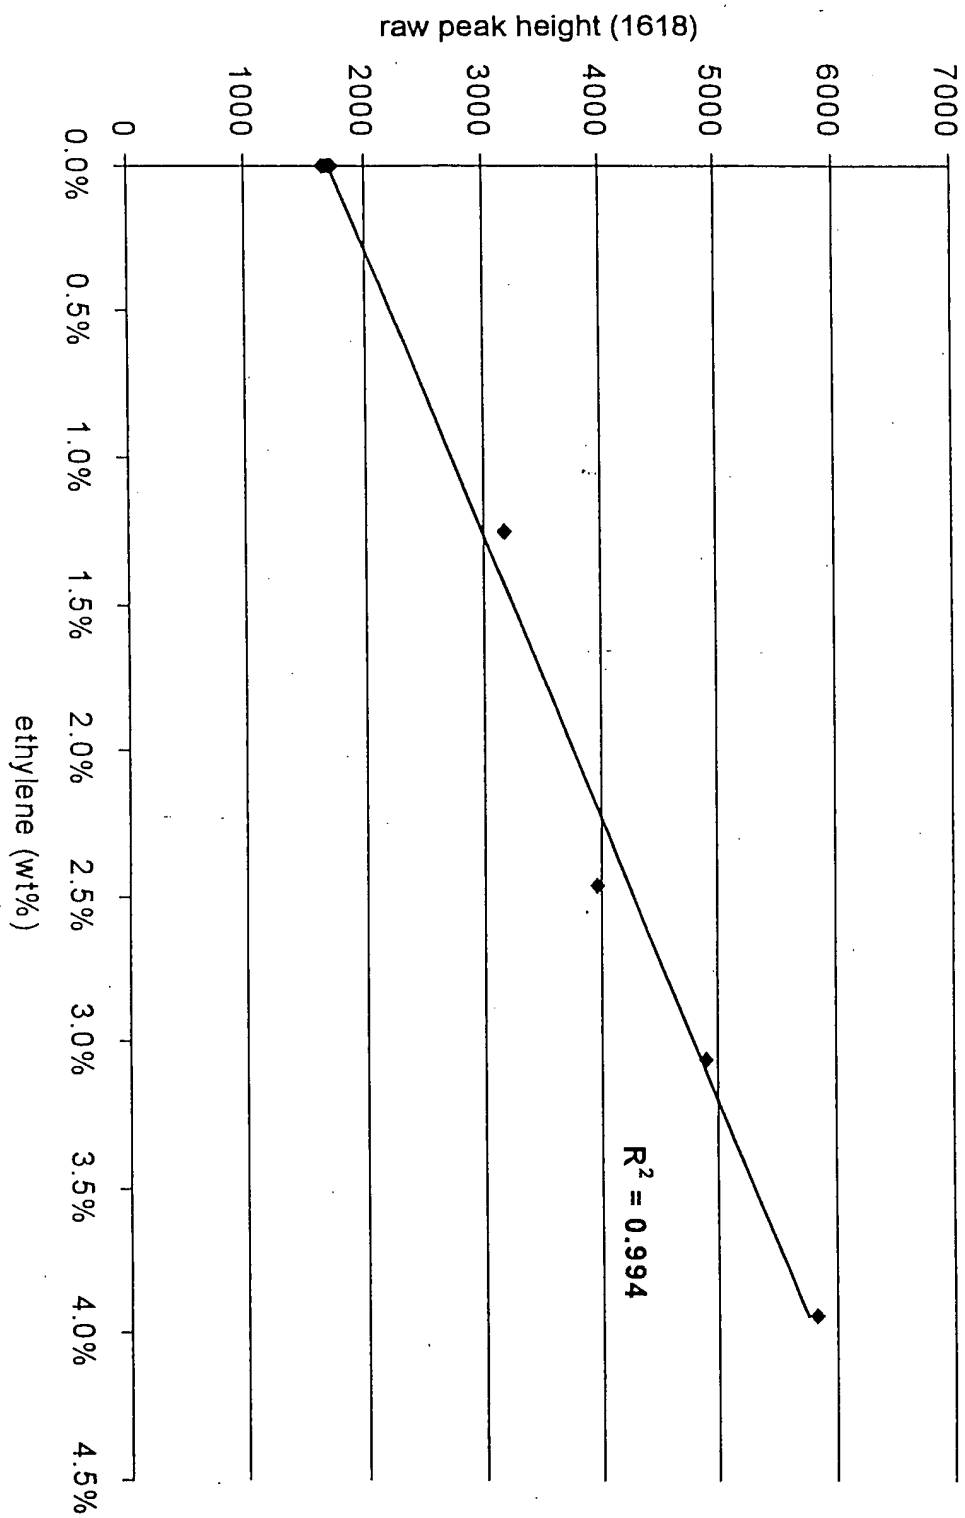

PRINT OF DRAWINGS  
AS ORIGINALLY FIT

Figure 13

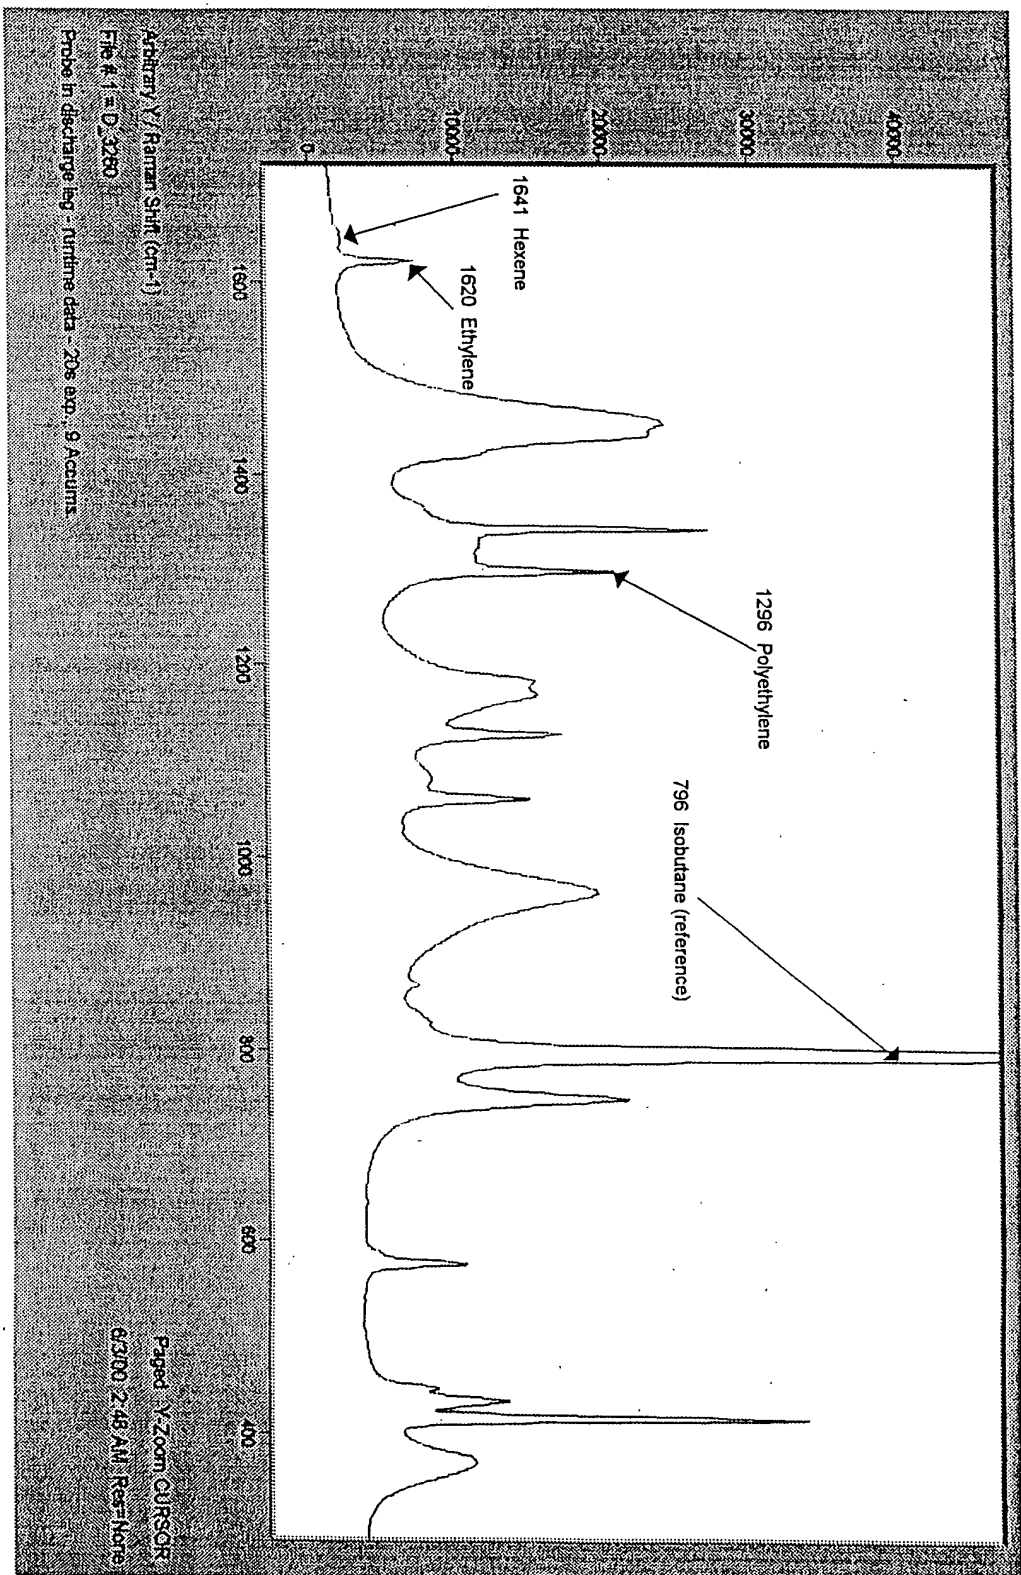

2000 1800 1600 1400 1200 1000 800 600 400

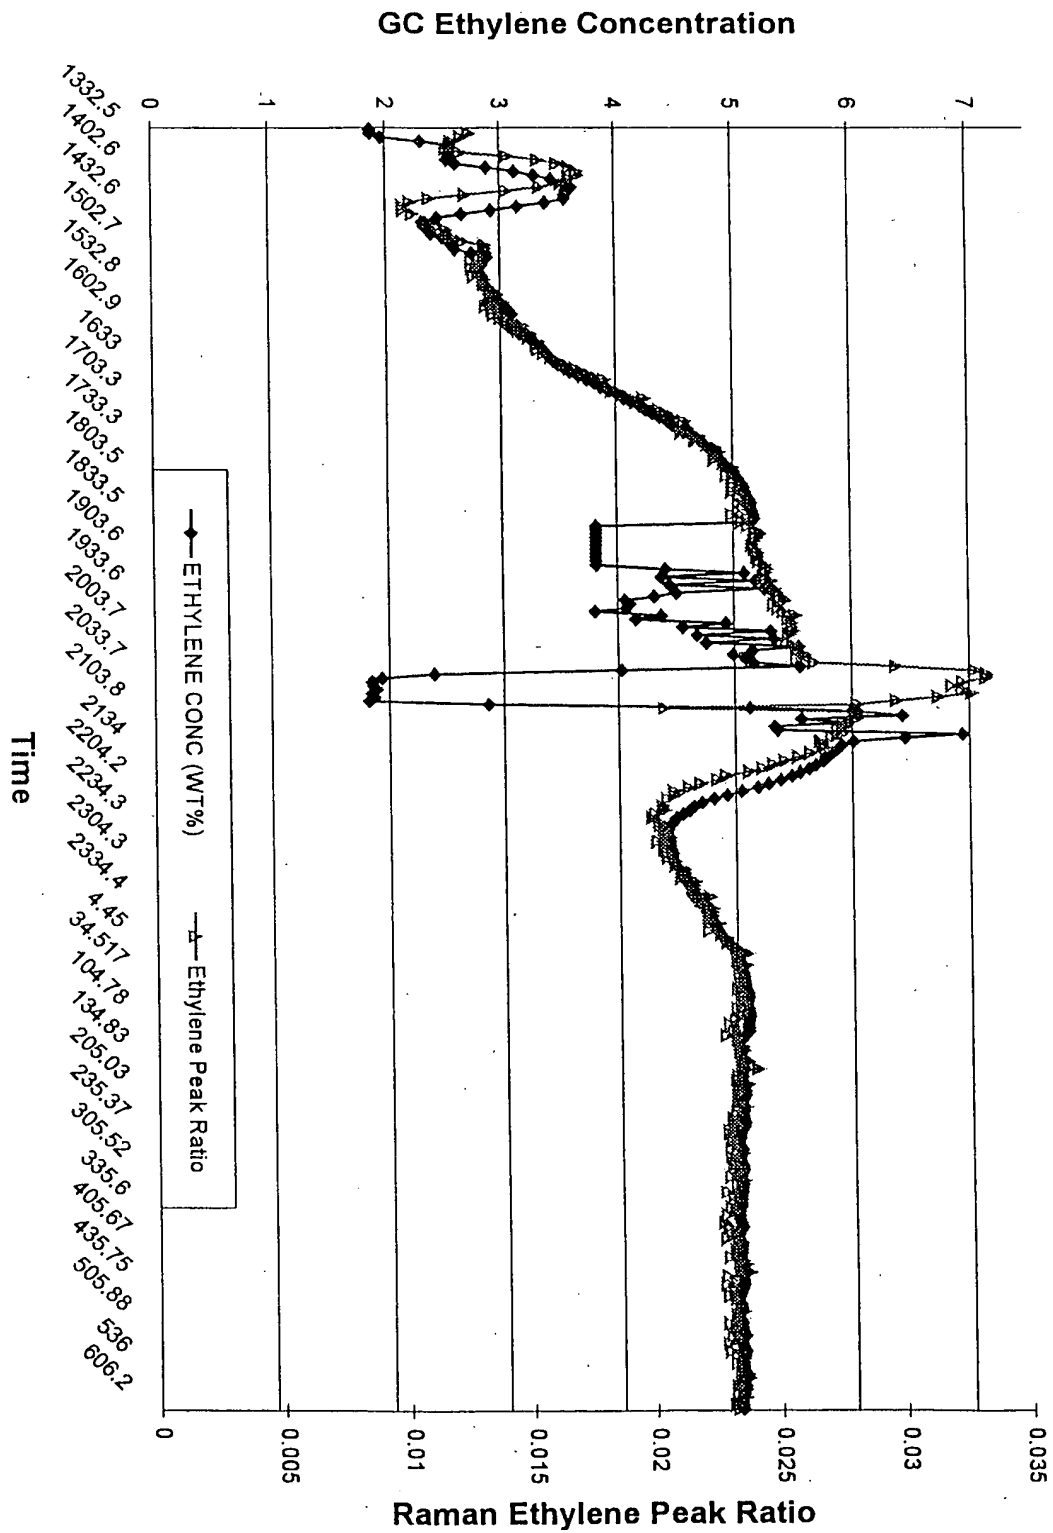


Figure 14



PRINT OF DRAWINGS  
AS ORIGINALLY FILED

Figure 15


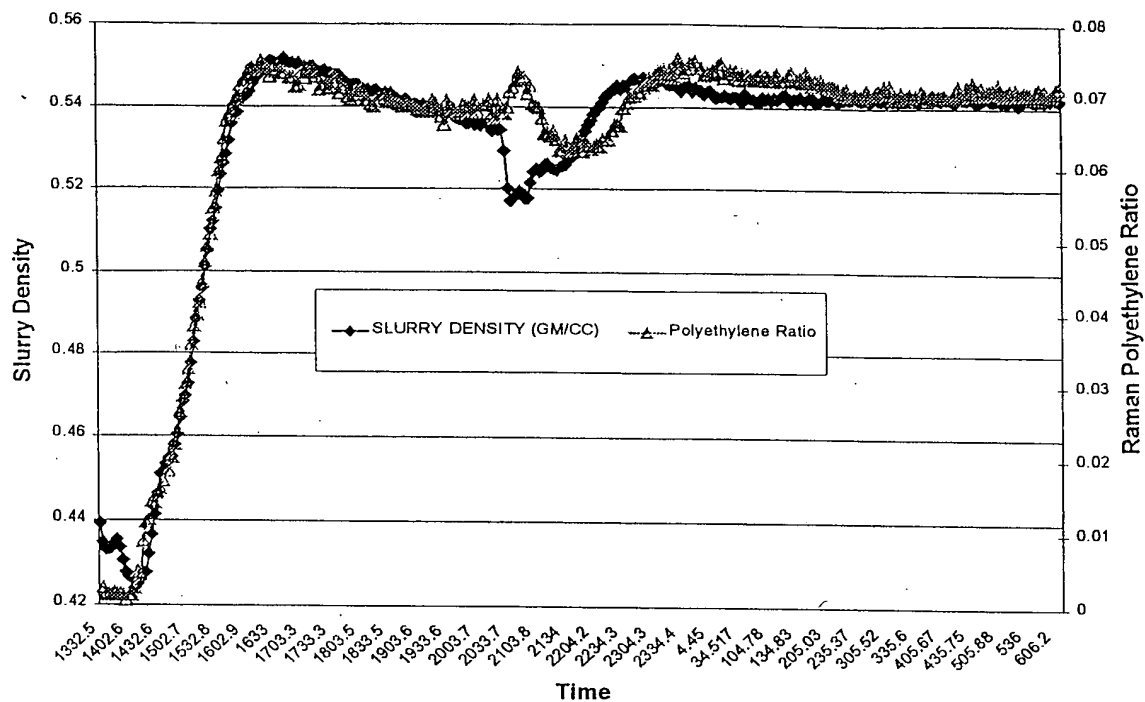


Figure 16

# Imaging probe assembly

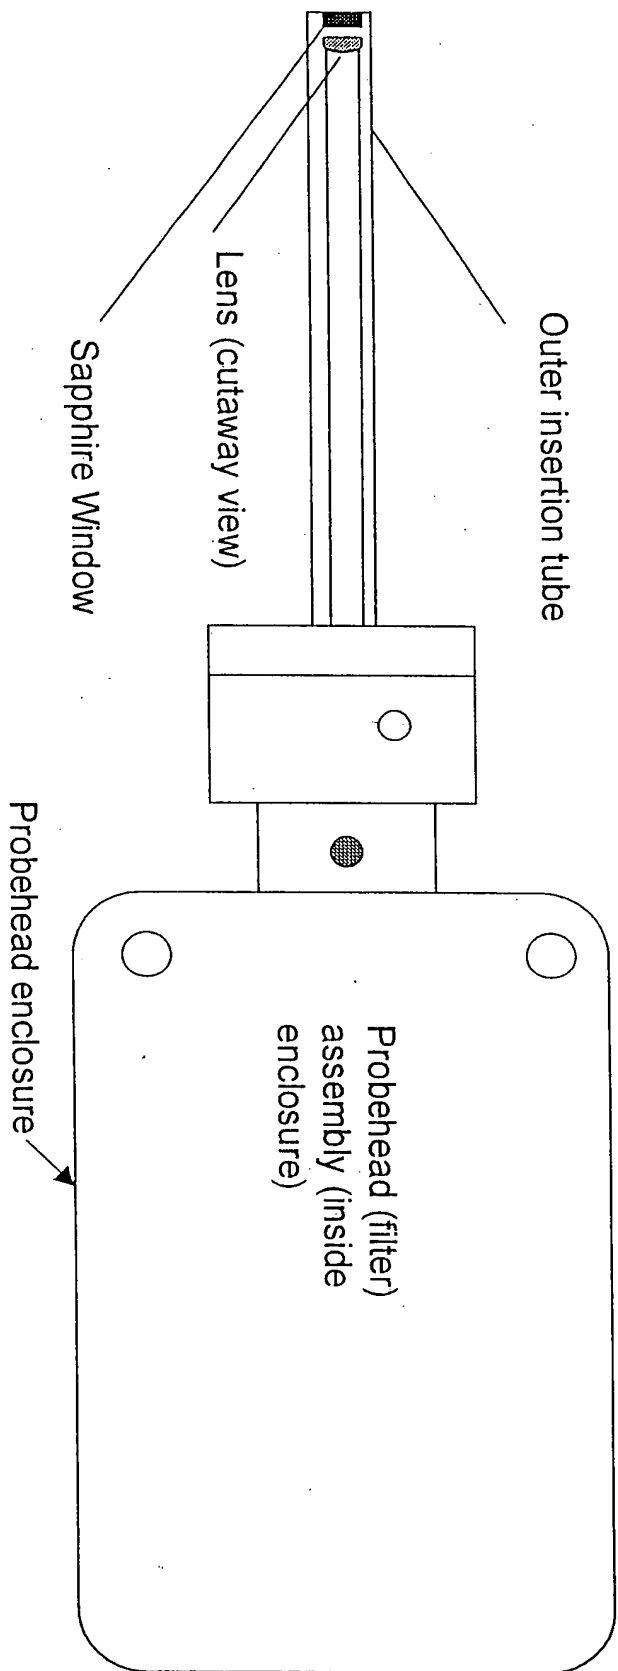

PRINT OF DRAWINGS  
AS ORIGINALLY FILED

THIS DRAWING IS THE PROPERTY OF THE U.S. GOVERNMENT AND IS TO BE REPRODUCED IN FULL OR IN PART WITHOUT LIMITATION.